

Aquametrix Model P575/R575 Combination Style pH / ORP Probes



Features

- Convertible design for flow through and submersion use
- Constructed of durable materials for excellent chemical resistance
- Industrial-grade quality at low cost
- With or without temperature compensation

Description

These industrial combination pH or ORP probes use the conventional measurement technique employing a process pH glass electrode (platinum for ORP) which is compared to a reference electrode in KCl solution.

These combination probes provide an economical alternative to higher cost models. The durable materials wetted by the process provide excellent chemical

resistance. The convertible design of these probes allows them to be used in flow-through and submersion applications thus minimizing inventory requirements. The probes are offered with or without temperature compensation.

CPVC mounting hardware is available for submersion and flow-through. These industrial combination probes are available with an optional screw-on protector for

submersion mount use. It is easily removed for flow-through installations when the probe is mounted to a tee.

The 575 can be directly connected to the Shark, SharkTX/P and 2200P/R analyzers, provided the instrument is within reach of the 3 meter sensor cable. For longer transmission distances, a preamplifier with automatic or fixed temperature compensation are available. Refer to other side for more details.

An alternative model is installed with a 3/4" MNPT compression fitting. With this design the probe does not screw into the process line but is simply inserted through the compression fitting. Probe cleaning and system calibration is greatly facilitated. Ask for data sheet P585 / R585.

Applications

- Process Control
- Industrial and Municipal Water Treatment
- Industrial and Municipal Waste Treatment and Neutralization
- Fume Scrubbers
- Plating
- Circuit Board Manufacturing
- Food and Beverage
- Chemical Processing
- Pulp and Paper
- Mining
- Power Generation
- Pharmaceutical Industry

Model P575/R575 Combination Style pH or ORP Probes

Technical Data

Measuring Range

pH 0 to 14 pH (Consult factory for applications below 2 or above 12).

ORP -1000 to +1000 mV

Wetted Materials

CPVC body, ceramic junction, glass electrode, EPDM (plus platinum for ORP)

Temperature Limits

-5 to 80°C (23 to 176°F)

Maximum Pressure

100 psig to 65°C

Maximum Flow Rate

3 meters (10 ft.) per second

Sensitivity

pH 0.01 pH

ORP 1.0 mV

Stability

pH 0.05 pH per day, non-cumulative

ORP 3.0 mV per day, non-cumulative

Output Impedance


pH 250 Megaohms (typical)

ORP 2.0 Megaohms (typical)

Sensor Cable

3 metres (10 ft.) coaxial, terminated with a spade lug for active electrode, other wires tinned

Dimensions

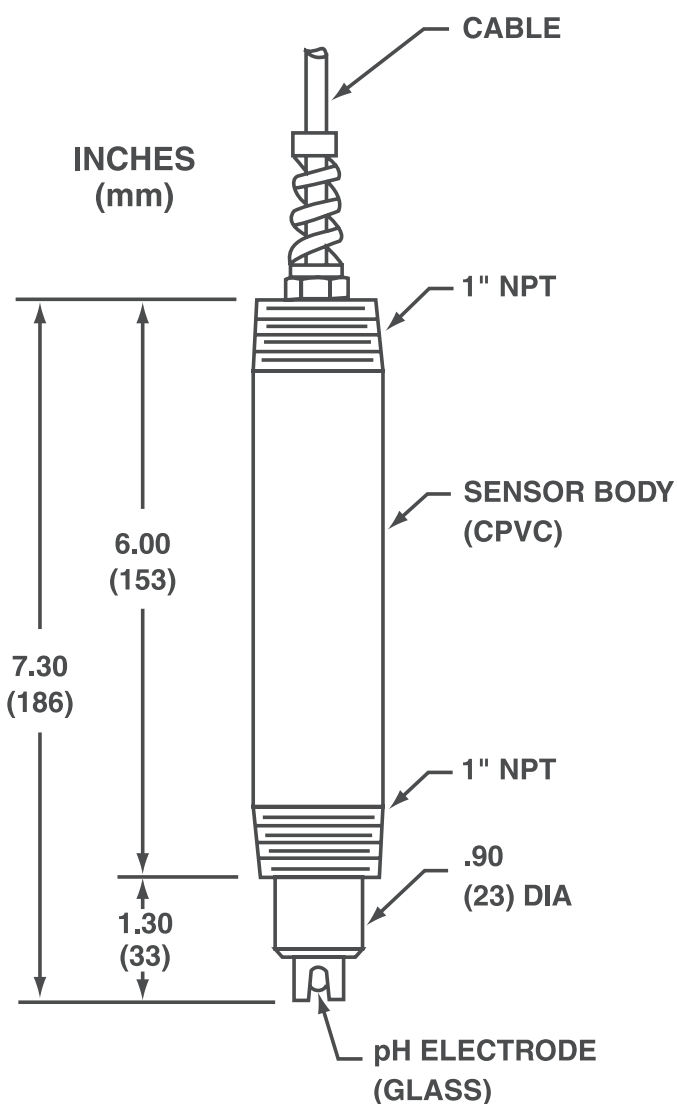

Related Products

CABLES & ACCESORIES

- MH575S** Submersion hardware
- JB1** NEMA 4X junction box with junction box
- C42-5PXXX** Interconnect cable; dressed both ends - specify length
- 101-A** Encapsulated preamplifier in NEMA 4X enclosure
- 101-A-BNC** Encapsulated preamplifier with BNC connection in NEMA 4X enclosure
- Protector-5** Submersion Protector

CALIBRATION SOLUTIONS

- A35-13** pH 4 Buffer, 500 mL.
- A35-14** pH 7 Buffer, 500 mL
- A35-24** pH 10 Buffer, 500 mL
- A35-40** ORP Buffer, 200 mV, 500 mL
- A35-41** ORP Buffer, 600 mV, 500 mL

Ordering Information

- P575/P575-BNC** Industrial Combination pH probe for flow-through or submersion application without temperature compensation. BNC connector is available as an option.
- P575K1** Industrial Combination pH probe for flow-through or submersion application with automatic temperature compensation. Compatible with Shark and SharkTX/P analyzers only. (PT1000 RTD)
- P575K2** Industrial Combination pH probe for flow-through or submersion application with automatic temperature compensation. (300 ohm NTC)
- R575/R575-BNC** Industrial Combination ORP electrode for flow-through or submersion application. BNC connector is available as an option.