



Extended-life filter bags improve filtration processes

Eaton's DURAGAF extended-life filter bags are suitable for a wide range of applications such as water treatment, chemicals, paints and varnishes, adhesives, petrochemicals and applications in the automotive, metal-processing, food and beverage industries (POXLF, PEXLF only) and many more.

The polypropylene or polyester needle felt construction of the DURAGAF extended-life filter bags, along with the increased thickness of the filter material, significantly increases the dirt-holding capacity and extends the lifetime by two to five times longer than standard needle felt filter bags. These features significantly reduce operating costs.

In addition, the needle felt material with smaller diameter fibers also provides a more porous filter material while maintaining the same low initial differential pressure.

Features and benefits

- The reinforced filter material thickness facilitates gel removal
- Lower operating costs due to extended lifetime
- DURAGAF filter bags are available in PEXLF and POXLF materials and comply with FDA and EC directives and regulations for food contact

- Special surface treatment significantly reduces fiber migration
- Material is free from silicone and crater-forming substances¹
- Fully-welded construction with patented SENTINEL® seal ring provides 100% bypass-free filtration
- The pressure-activated SENTINEL seal ring provides a flexible, chemically resistant seal which adapts to any bag filter housing
- Eaton strongly recommends the use of an insertion tool that facilitates the insertion of the filter bag into the bag filter housing and ensures the correct alignment of the filter bag inside the restrainer basket

Filter specifications

Materials

Extended-life needle felt polypropylene or polyester

Seal rings

Welded polypropylene or polyester SENTINEL seal ring

Retention ratings

1, 5, 10, 25, 50, 100 µm

Dimensions/Parameters

Sizes

01: Ø 7 x 17" L (180 x 430 mm)
02: Ø 7 x 32" L (180 x 810 mm)

Filter area

01: 2.6 ft² (0.24 m²)
02: 5.2 ft² (0.48 m²)

Max. operating temperatures

Polypropylene: 194 °F (90 °C)
Polyester: 302 °F (150 °C)

Max. differential pressure

36.2 psi (2.5 bar)

Recommended change-out pressure for disposal²

11.6 – 21.7 psi (0.8 – 1.5 bar)

Max. flow rates³

01: 66 GPM (15 m³/h)
02: 132 GPM (30 m³/h)



FDA/EC conformity

All polypropylene and polyester materials used (POXLF and PEXLF only) comply with EC Regulation 1935/2004 and EC Directive 2002/72/EC as well as FDA requirements according to Title 21, Section 177, as applicable for food and beverage contact.



Powering Business Worldwide

DURAGAF Filter Bag Range

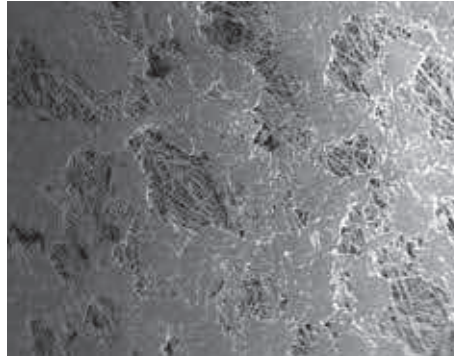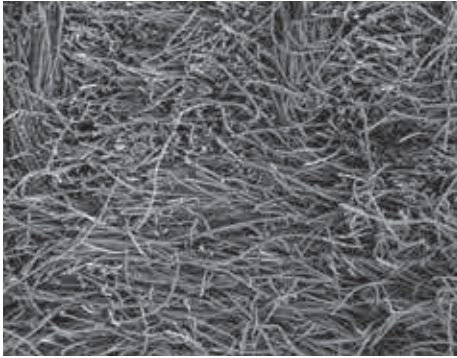


Extended-life needle felt in comparison to standard needle felt

- Finer fibers
- Greater porosity
- Thicker media

Surface of a DURAGAF filter bag

- No fiber release
- Full flow through surface channels

Ordering information

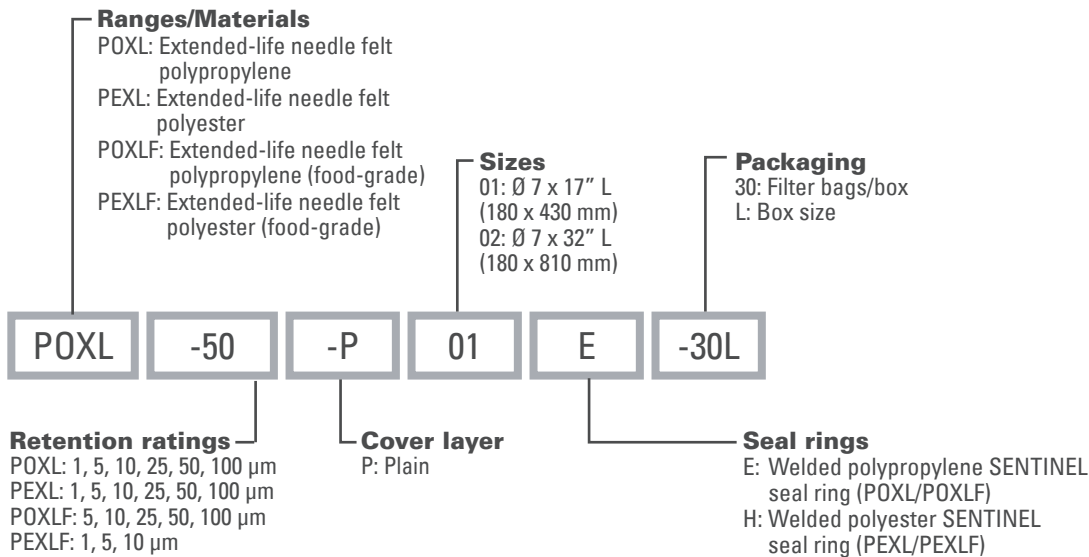

¹ Based on an accepted paint compatibility test (see document QUC-STA-10).

² Depending on the respective application requirements.

³ For liquids with a dynamic viscosity of 1 mPa·s @ 68 °F (20 °C).

North America
 44 Apple Street
 Tinton Falls, NJ 07724
 Toll Free: 800 656-3344
 (North America only)
 Tel: +1 732 212-4700

China
 No. 3, Lane 280,
 Linhong Road
 Changning District, 200335
 Shanghai, P.R. China
 Tel: +86 21 5200-0099

Europe/Africa/Middle East
 Auf der Heide 2
 53947 Nettersheim, Germany
 Tel: +49 6205 809-0

Singapore
 4 Loyang Lane #04-01/02
 Singapore 508914
 Tel: +65 6825-1668

Friedensstraße 41
 68804 Aitlußheim, Germany
 Tel: +49 6205 2094-0

Brazil
 Rua Clark, 2061 - Macuco
 13279-400 - Valinhos, Brazil
 Tel: +55 11 3616-8400

An den Nahewiesen 24
 55450 Langenlonsheim, Germany
 Tel: +49 6704 204-0

For more information, please
 email us at filtration@eaton.com
 or visit www.eaton.com/filtration

US
 EF-FTB-06
 01-2017

© 2017 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

