

HX SERIES, SPIRAL FLUOROPOLYMER (PTFE) HEATERS						
WATTS	VOLTS	HOT ZONE In. / (mm)	OVERALL LENGTH In. / (mm)	MAX. COLD ZONE In. / (mm)	MODEL NUMBER	SHIP WGT. Lbs. / (kg)
500	120	5 (127)	11 (279)	41 (1041)	HX.5111-**	6
	240				HX.5211-**	(2.7)
1000	120	7 (178)	11 (279)	41 (1041)	HX1111-**	7
	240				HX1211-**	(3.2)
2000	120	12 (305)	17 (432)	40 (1016)	HX2117-**	8
	240				HX2217-**	(3.6)
	480				HX2417-**	
3000	240	16 (406)	23 (584)	40 (1016)	HX3223-**	13
	480				HX3423-**	(5.9)
4000	240	20 (508)	29 (737)	40 (1016)	HX4229-**	15
	480				HX4429-**	(6.8)
5000	240	25 (635)	35 (889)	36 (914)	HX5235-**	18
	480				HX5435-**	(8.2)
6000	240	29 (737)	40 (1016)	30 (762)	HX6240-**	21
	480				HX6440-**	(9.5)
8000	240	37 (940)	47 (1194)	32 (813)	2HX8247-**	25
	480				2HX8447-**	(11.3)
9000	240	44 (1118)	54 (1372)	35 (889)	2HX9254-**	28
	480				2HX9454-**	(12.7)

SINGLE PHASE ONLY. Guards recommended.

HX Series, Spiral Heater Features and Benefits

SUPERIOR CHEMICAL RESISTANCE:

- Inert to most aqueous acid, alkaline, anodizing and pickling solutions up to 212°F (100°C).

RUGGED CONSTRUCTION:

- Heavy wall fluoropolymer (PTFE) covered stainless steel element reduces permeation and reduces the need for gas purge systems. Guaranteed 100% pinhole free.

OUTSTANDING PERFORMANCE:

- Low watt density design (10 watts/square inch (1.5w/cm²) uses minimal space and ensure long service life.

CORROSION RESISTANT HEAD:

- Vapor resistant, flame retardant polypropylene terminal enclosure with 3 ft (.9m) flexible PVC liquid tight conduit.

SAFETY FEATURES:

- Grounded internal metal element.
- Thermal protector built in. Replaceable P1 protector standard for solutions up to 180°F(82°C).
- Non-floating construction.

CERTIFICATIONS:

cULus listed and CE compliant (except 600 volts).


SIZES: 500 watts to 9,000 watts.

VOLTAGES: 120 to 600 volts.

OPTIONS AVAILABLE (consult factory):

- Resettable thermal protectors:
 - P2: For solutions up to 180°F(82°C)
 - P8: Type-J thermocouple for solutions up to 210°F(99°C).
 - P3: Type-J thermocouple for solutions up to 250°F(121°C).
- Polypropylene guards: Recommended for applications up to 180°F(82°C) (sold separately).
- Fluoropolymer (PTFE) guards: Recommended for chromic acid and solutions over 180°F(82°C) (sold separately).
- Special configurations and lengths.
- Longer wire and conduit lengths.
- Flexible continuous fluoropolymer leads (P3 protector only).
- Lower watt densities for highly viscous solutions and technical acids.
- Temperature and level controls sized to match the heater. (sold separately)

DIMENSIONS

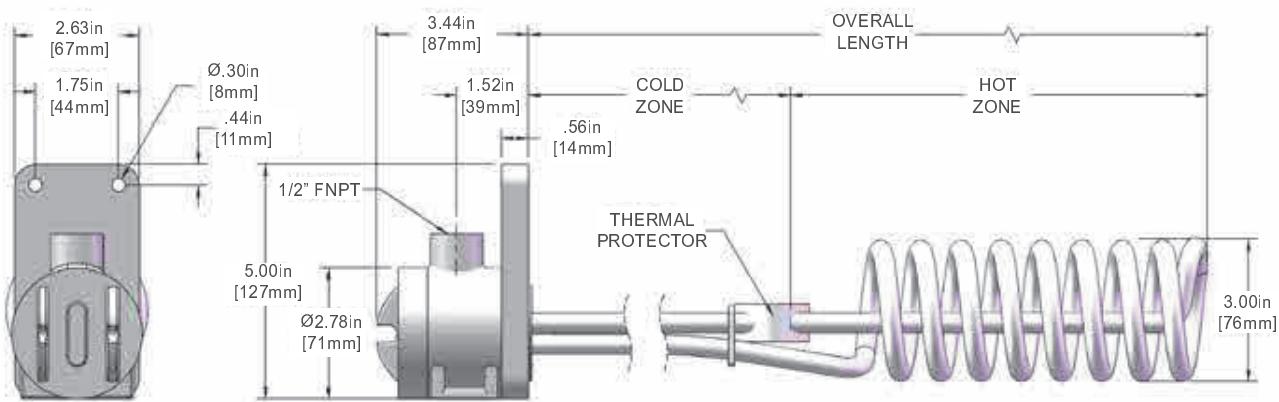

SPIRAL OVER THE SIDE FLUOROPOLYMER (PTFE) HEATER ORDERING INFORMATION

Series	Wattage	Voltage	Overall Length	Type of Protector	Wire and Conduit Length				
.5 = 500		1 = 120	11 = .5kW		36" length standard (no designator). Specify variations from standard Ex: -X84 = 84"				
1 = 1000		2 = 240	11 = 1kW						
2 = 2000		3 = 380	17 = 2kW						
3 = 3000		4 = 480	23 = 3kW						
4 = 4000		5 = 415	29 = 4kW						
5 = 5000		6 = 600	35 = 5kW						
6 = 6000		7 = 400	40 = 6kW						
8 = 8000		8 = 208	47 = 8kW						
9 = 9000		9 = 220	54 = 9kW						
		0 = 200	Specify custom lengths, not to exceed tank depth.						
Replaceable Protector									
P1		For solutions up to 190°F							
Resettable Protector									
(additional control components required)									
P2		For solutions up to 190°F							
P8		For solutions up to 210°F							
P3		For solutions up to 250°F							

HX = PTFE sheathed
 2HX = 2 element PTFE sheathed
 HS = 304 Stainless Steel
 2HS = 2 element 304 stainless steel

ORDERING EXAMPLE:

HX5435-P1-X60

Spiral over the side fluoropolymer heater, 5000 watts, 480 volt, single phase, 35" overall length, P1 thermal protector, 60" wire and conduit.

